


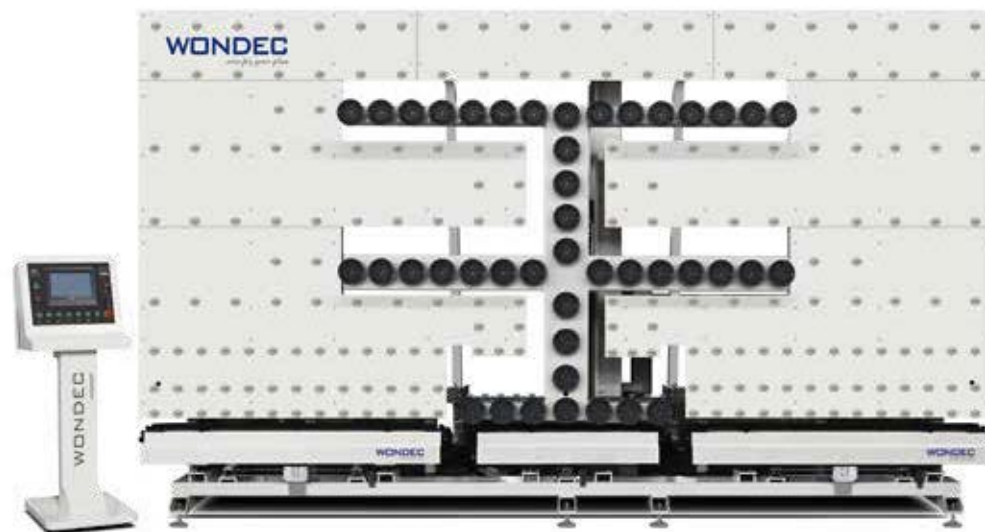

This machine is suitable for taking glass sheet of insulating glass equipment, washing machine, edging machine and other equipment.
Servo motor control, simple operation, safety and reliability.

The operation is controlled by touch screen, is easy to understand.

It can meet the cutting depth within 850mm, and can directly carry out the glass from the glass frame.

The machine has the functions of automatic alarm for material shortage, under-voltage waiting of sucker, power failure protection and so on, and the safety factor is extremely high.

High-quality vacuum sucker is used, with high negative pressure and sufficient suction, and the glass is firmly adsorbed and does not fall off.

When the glass is unloaded, the unloading machine prevents the single piece of glass from falling after the insulating glass is laminated, and is equipped with an air cylinder lifting mechanism.

Can be customized according to customer needs.

WAUL2540/3060

Automatic Glass Unloading Machine

WAUL2850
WAUL3370

Custom sizes according to user's needs

	WAUL2540	WAUL3060
Power supply	AC220V 50HZ	AC220V 50HZ
Total power	7.0kW	14kW
Air pressure	0.6~0.8MPa	0.6~0.8MPa
Thickness of glass	≤60mm	≤60mm
Max. grab glass size	2500×4000mm	3000×6000mm
Min. grab glass size	300×500mm	300×500mm
Transfer speed	2~48mm	2~48mm
Overall dimensions	4000×2800×3050mm	6200×2800×3550mm